

### Application:

Oventrop compact distributor for the connection of the "Regumat" stations DN 25 ("Regumat" DN 32 with reducers). Consisting of distributor, thermal insulation and wall bracket including fixing material. The distributor is, for instance, used for volume distribution from the heat generator to several heating circuits.

### Advantages:

- space-saving installation
- simple installation
- problem-free water distribution even for small performance ranges

Models:	Item no.:
for 3 heating circuits	1351783
for 5 heating circuits	1351785

### Materials:

Distributor:	Steel, primed black
Thermal insulation:	Expanded polypropylene
Wall bracket:	Steel, galvanised


### Connections:

To heating circuit:	G 1½ collar nut, flat sealing
To boiler:	G 1½ male thread, flat sealing


**The direction of flow must be observed!**

### Technical data:


Max. operating pressure:	4 bar
Max. operating temperature:	110 °C
Max. flow rate:	4 m³/h
Recommended application range:	Max. 95 kW ( $\Delta T = 20K$ )

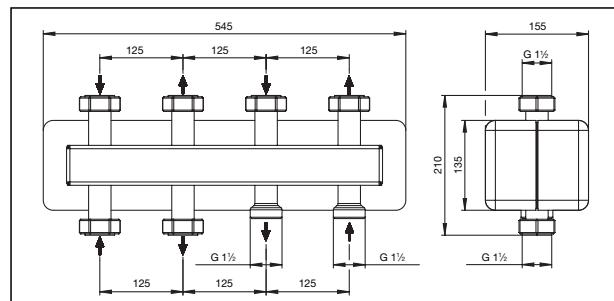

Dimensions compact distributor DN 25, 3-fold

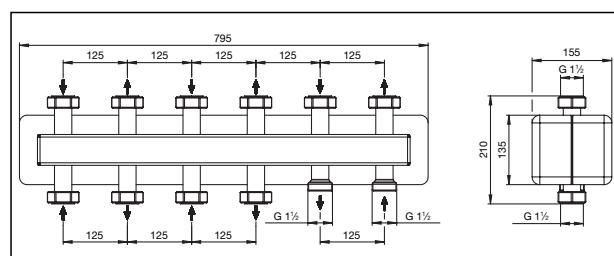

Dimensions compact distributor DN 25, 5-fold

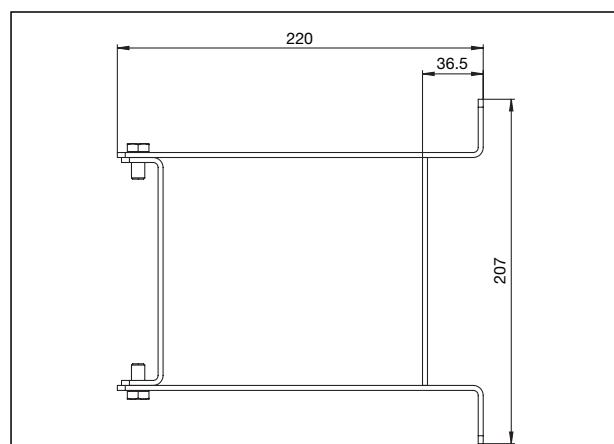

Dimensions wall bracket

Subject to technical modification without notice.

Product range 6  
ti 293-EN/10/MW  
Edition 2015